




MINI KIK



Two-way
protocol

Radio control

MINI KIK

The Mini KIK is the compact version of the KIK 1, designed to control motors for curtains, blinds or awnings. It has a range of up to 200 metres outdoors and 35 metres indoors. This subsidiary remote control requires a KIK 1 or KIK 15 previously programmed with the motor to operate. It cannot be programmed independently and guarantees reliable control once set up.

REFERENCE




MINI KIK | 10.000.007

Control for bidirectional motors
 Radio frequency 433.92 Mhz
 Measurements: 63 x 35 x 13 mm

TECHNICAL CHARACTERISTICS


Name	No.Channels	Feeding	Battery Type	Frequency	Temperature	Measures
MINI KIK	1	3V	Lithium CR2430	433.92 Mhz	-10 a 50° C	63 x 35 x 13 mm

DESCRIPTION OF THE KEYS

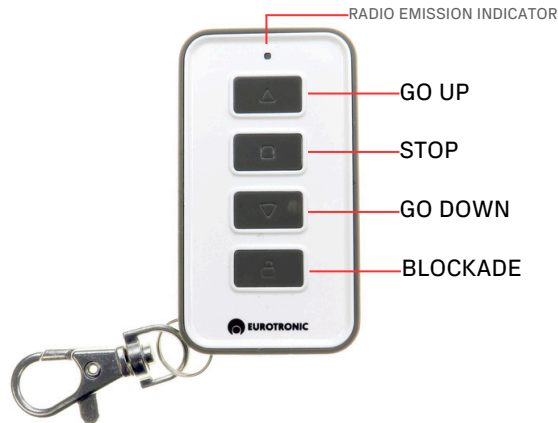

INSTRUCTIONS:

1. LINK MINI KIK TO THE MAIN REMOTE

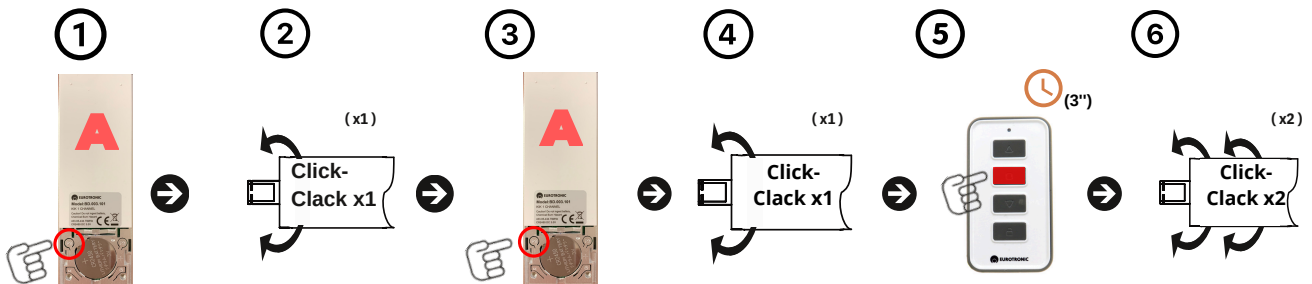

Procedure:

1. Press the button (P2) located behind the main transmitter (A).
2. The motor will make a CLICK-CLACK (x1) and a beep (x1).
3. We will press the button (P2) of the same transmitter (A) again.
4. The motor will make a "CLICK-CLACK" sound (x1) and a beep sound (x1).
5. Then press the (STOP) button for three seconds (3'') on the MINI KIK to confirm.
6. The motor will make two "CLICK-CLACK" sounds (x2) and three beeps (x3).



www.eurotronic-europe.com

C/Pica d'Estats, 108-118 Poligono Industrial Sant Isidre
08272 Sant Fruitós de Bages (Barcelona) SPAIN

pedidos@eurotronic-europe.com Tel: +34 932 420 108